

SilentFlo

Pool Pump

By Sta-Rite



The quietest and most efficient pump available

Pentair Water answers the latest issues in the Swimming Pool Industry with the release of the SilentFlo range of pumps.

These are the quietest and most efficient pumps available, to minimise the cost and maximise the enjoyment of pool ownership.

Typical Applications

- Pools from 20,000 litres up to 130,000 litres.
- High quality pools where quiet operation is a must.
- Pools where high efficiency is required.

Features

- Extremely quiet hydraulic design enabling you to run this pump at night, without disturbing the neighbours, taking advantage of the off-peak tariffs
- Extremely efficient hydraulic design which minimises running costs for your customers
- Elevated base - further dampens sound and vibration, and keeps the pump above sitting water, minimising pump corrosion
- Stainless Steel motor shaft extends the life of the pump by reducing corrosion



STA-RITE®

Pentair Water

SilentFlo

Pool Pump




Features

- Large volume strainer basket minimises the maintenance requirement by extending the time between strainer basket clean outs
- Included 50mm barrel unions making it quick and easy to install, while allowing pump removal without flexing pipework
- Dual connections: 50mm thread or 50mm barrel unions allows piping flexibility - threaded connections allow for permanent installation - service is still possible by removing the motor and yoke from the casing
- Thermoplastic casing and hydraulic parts provides total corrosion resistance for long life and peace of mind
- The SilentFlo range of pool pumps have passed all the requirements of AS/NZS 60335.2.41:2004 for safety, and is approved for installation within the wetted zone of the pool area
- Captive bolts for easy servicing, no lost fasteners

Motor

| | |
|----------------------|---------------------------|
| Type: | TEFC 2 pole |
| Nominal speed: | 2900 rpm |
| IP rating: | IP44 |
| Insulation class: | Class F |
| Thermal overload: | Internal, automatic reset |
| Temperature rise: | Class F |
| Voltage: | 230-240V |
| Frequency: | 50Hz |
| Bearing type: | Deep groove ball bearing |
| Bearing temp rating: | 120°C |

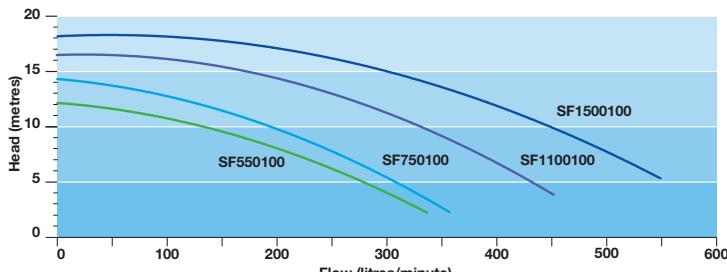

Materials

| | |
|------------------------|---|
| Pump Casing | Reinforced Polypropylene 40% Glass Filled |
| Impeller | Polyphenylene Ether |
| Diffuser | Polypropylene HP TF 40% |
| Yoke | Polypropylene 40% Glass Filled |
| Drain plugs | Polypropylene |
| Motor shaft | SS 303 |
| End shield | Cast Aluminium |
| Strainer basket | High Impact Polystyrene |
| Strainer basket o-ring | Low friction nitrile |
| Strainer pot lid | Makrolon Polycarbonate |
| Barrel unions | Acrylonitrile Butadiene Styrene |
| Base | Copolymer Polypropylene |
| Seal bellows | Nitrile |
| Seal stationary face | Aluminium oxide |
| Seal rotating face | Carbon |
| Seal Spring | SS 316 |

Model Data

| Pump Model | Motor power | Supply Voltage | Phase | Full Load current | Locked Rotor current | Capacitor | Thermal protection cutout | Insulation class | Speed (2 pole) |
|-----------------|-------------|----------------|-------|-------------------|----------------------|-----------|---------------------------|------------------|----------------|
| Abbreviation | P1 | P2 | | FLA | LRA | | | | |
| Unit of Measure | Watt | Watt | V | n | Amp | Amp | µF | °C | rpm |
| SF550100 | 580 | 400 | 230 | 1 | 2.6 | 14 | 25 | 150 | F 2800 |
| SF750100 | 690 | 485 | 230 | 1 | 3.0 | 14 | 25 | 150 | F 2800 |
| SF1100100 | 1020 | 715 | 230 | 1 | 4.5 | 22 | 25 | 150 | F 2800 |
| SF1500100 | 1540 | 1075 | 230 | 1 | 6.7 | 28 | 30 | 150 | F 2800 |

| Pump Model | Run coil resistance | Start coil resistance | Sound Pressure Level | IP Rating | Bearing type | Bearing temp rating | Max Working temp | Max water temp | Min water temp | Max working pressure |
|-----------------|---------------------|-----------------------|----------------------|-----------|--------------|---------------------|------------------|----------------|----------------|----------------------|
| Abbreviation | | | SPL | | | °C | °C | °C | °C | kPa |
| Unit of Measure | Ohms | Ohms | dBA | | | | | | | |
| SF550100 | 4.64 | 5.69 | 56 | IP55 | 6203 | 120 | 50 | 35 | 5 | 360 |
| SF750100 | 4.64 | 5.69 | 56 | IP55 | 6203 | 120 | 50 | 35 | 5 | 360 |
| SF1100100 | 3.22 | 5.69 | 59 | IP55 | 6203 | 120 | 50 | 35 | 5 | 360 |
| SF1500100 | 1.99 | 3.78 | 61 | IP55 | 6203 | 120 | 50 | 35 | 5 | 360 |



Pentair Water
Pool and Spa®

Australia

Freecall 1800 664 266 Web: pentairwater.com.au

Email: au.sales@pentairwater.com Fax: 1800 006 688

New Zealand

Freecall 0800 664 269 Web: pentairwater.com

Email: nz.sales@pentairwater.com

Auckland Fax: +64 9 579 6497

Christchurch Fax: +64 3 343 1054

Phone: 65 6795 2213 Fax: 65 6795 2219

Email: singapore.sales@pentairwater.com

L3 00147-A0710

Singapore



pumps / filters / heaters / heat pumps / automation / lighting / cleaners / sanitisers / maintenance products



Pentair Water Australia Pty Ltd. ACN 004 856 204 ©Registered to Onga Pty Ltd ABN 27 004 856 204